





## Pilkington **Mirropane™** Chrome ... shines despite high humidity and moisture!

Pilkington **Mirropane™** Chrome is suitable for wet areas and rooms with high humidity e.g. in shower rooms, wellness oasis or indoor swimming pools. Moisture cannot attack the resistant coating.

Pilkington **Mirropane™** Chrome combines reliability with a shiny appearance in applications, where classic silver mirrors have reached their limits.

## Pilkington **Mirropane™** Chrome

Mirrors are incredibly versatile – they open up far-reaching design options and combine a functional utility with aesthetics. They can visually enlarge rooms, can be used as a decorative style element to create design, or produce visual effects by playing with reflections. These mirrors will be the highlight in any room.

The new chrome-mirror Pilkington **Mirropane™** Chrome is not only an aesthetic highlight, it can be used in areas, where safety and stability require the highest standards.



## ... makes an aesthetic highlight!

Pilkington **Mirropane™** Chrome is offered in a variety of applications, because it is easy to toughen and laminate.

Pilkington **Mirropane™** Chrome is a perfect glass for shower cabinets, glass doors or other applications with glass fittings, in which a filigree construction is required, due to the combination of safety characteristics with excellent corrosion-resistance.

The elimination of a glass frame in favor of a point-fixed mounting supports the aesthetic claim for the use of mirrors as a decorative element. And that's not all: Mirrors without safety features cause significant risks of injury for example mirrors in gyms and dance halls. The safety aspect of Pilkington **Mirropane™** Chrome is ideal for these applications.

## ... reflects individuality and identity.


By its low light transmission Pilkington **Mirropane™** Chrome can be combined with a backlight. These mirrors in bathrooms, or the lounges of hotels and cruise ships will be a visual highlight. The perfect view can be enhanced by using a lacquer for additional application.

Pilkington **Mirropane™** Chrome can fulfil additional design ideas:  
Logos and other individual design elements can be applied to the mirror by sandblasting to reflect lobbies or conference rooms, company or club identities.

Additionally, the mirror can be bent. Therefore its design is flexible – depending on the application and personal taste. The sky is the limit!

Pilkington **Mirropane™** Chrome offers brilliant performance in terms of safety and resistance:

- Excellent corrosion-resistance
- Easy to process to laminated safety glass and toughened glass
- Sandblasting of logos or design possible
- Bendable and easy to handle
- Available in standard thicknesses of 4-8 mm and available as laminated safety glass in thicknesses of 8-16 mm (6.000 mm × 3.210 mm). Other thicknesses available on request.

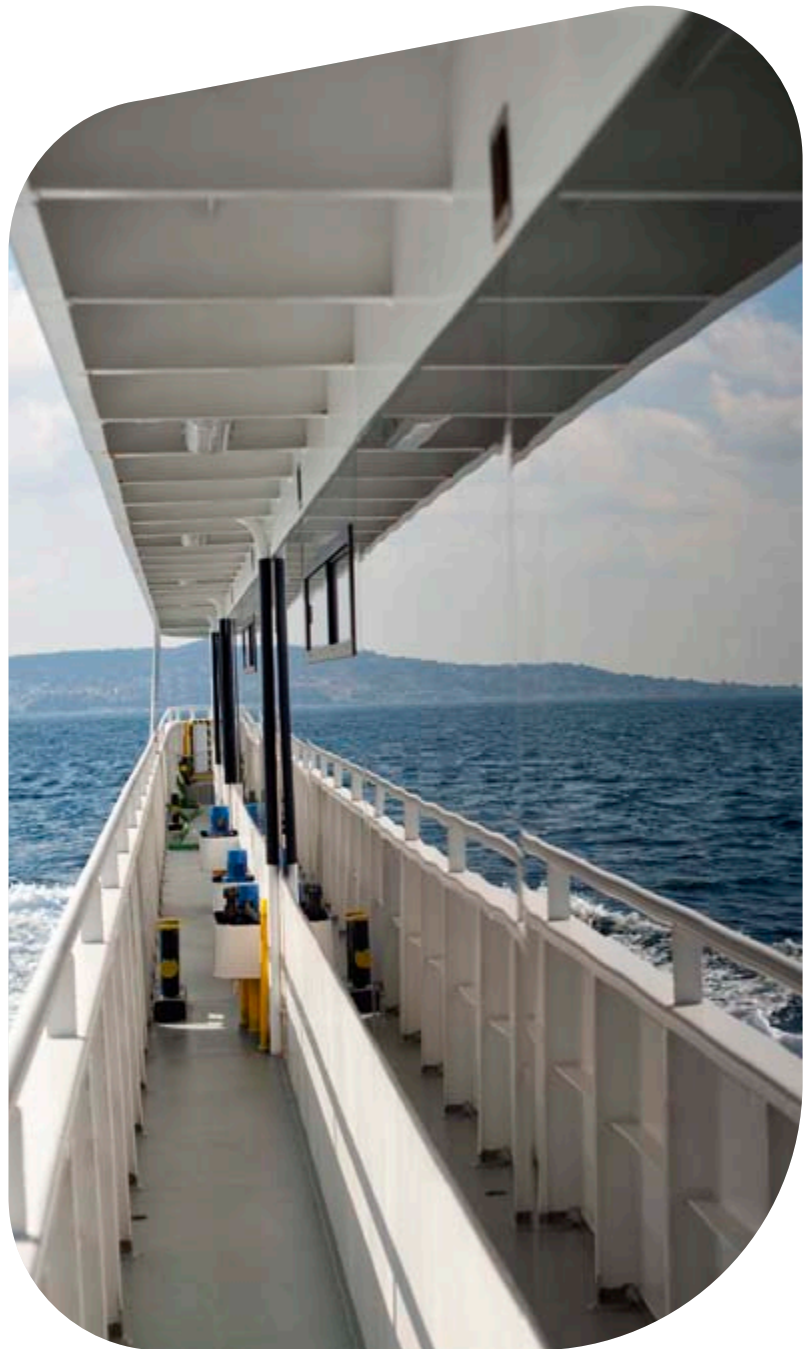

Pilkington **Mirropane™** Chrome – technical data

Thickness	Product features		
	Light transmission (%)	Light reflection coating site (%)	Light reflection glass site (%)
Pilkington <b>Mirropane™</b> Chrome 4 mm	2	62	54
Pilkington <b>Mirropane™</b> Chrome 6 mm	2	62	53
Pilkington <b>Mirropane™</b> Chrome 8 mm	2	62	52

The data refer to European standards, in particular DIN EN 410 and DIN EN 673.

This publication provides only a general description of the products. Further, more detailed, information may be obtained from your local supplier of Pilkington products. It is the responsibility of the user to ensure that the use of these products is appropriate for any particular application and that such use complies with all relevant legislation, standards, codes of practice and other requirements. To the fullest extent permitted by applicable laws, Nippon Sheet Glass Co. Ltd. and its subsidiary companies disclaim all liability for any error in or omission from this publication and for all consequences of relying on it. Pilkington and "Mirropane" are trademarks owned by Nippon Sheet Glass Co. Ltd, or a subsidiary thereof.



CE marking confirms that a product complies with its relevant harmonised European Norm.  
The CE marking label for each product, including declared values, can be found at [www.pilkington.com/CE](http://www.pilkington.com/CE)



**Pilkington Deutschland AG**

Hegestraße 45966 Gladbeck

Telefon +49 (0) 2043 405 56 52 Telefax +49 (0) 2043 405 56 66

E-Mail: [marketing.basisglas@nsg.com](mailto:marketing.basisglas@nsg.com)

**[www.pilkington.de](http://www.pilkington.de)**